

**MULTI-LAYER SUBSTRATE FOR A PREMOISTENED WIPE  
CAPABLE OF CONTROLLED FLUID RELEASE**

ARTHUR (NMN) WONG  
JEFFREY LAWRENCE FLORA

5

**TECHNICAL FIELD**

The present invention relates to substrates capable of controlled fluid release that are suitable for incorporation in a premoistened wipe. The invention further relates to premoistened  
10 wipes comprising the substrates containing a liquid composition incorporated therein.

**BACKGROUND OF THE INVENTION**

Premoistened wipes for cleaning surfaces are known in the art. For example, U.S. Patent No. 3,954,642 discloses a textile fibrous structure suitable for cleaning purposes and impregnated with surface active agents, in which the textile fibrous structures are built up from water-  
15 insoluble high polymers with a content of carboxyl groups able to form salts, which are present substantially as free carboxyl groups, and the impregnation consists of at least one nonionic surface-active agent from the group of water-soluble alkylene oxide derivatives. However, such textile fibrous structures, when subjected to pressure, quickly releases the composition incorporated therein, which reduces the overall area able to be cleaned by the wipe, due to the  
20 earlier premature release of the cleaning fluid. Therefore, when the composition is release too quickly from the substrate, the cleaning wipe is only able to clean relatively small areas before running out of cleaning solution.

Some developments have focused on providing a substrate for a premoistened wipe that will provide controlled release of fluid from the premoistened wipe. For example, U.S. Patent  
25 No. 5,507,968 discloses a cleansing article that comprises a porous pad that includes a controlled detergent release composition comprising a polyacrylamide polymer and a detergent. The polyacrylamide polymer is a water swellable polymer. In use, the polyacrylamide polymer swells and slowly dissolves to provide a controlled release of the detergent incorporated therein. However, such polymers tend to cause filming and streaking problems, especially on hard  
30 surfaces.

U.S. Patent No. 5,421,898 discloses an element for controlled release of a quaternary ammonium disinfectant in aqueous solution comprising a substrate coated with the residue of an aqueous composition of a certain water soluble polymer and a quaternary ammonium

disinfectant. The water soluble polymer has a molecular weight of 85,000 to 186,000 and a degree of hydrolysis of 87 to 89 percent. The aqueous composition of the water soluble polymer and quat is applied to the substrate and dried, leaving a residue on the substrate. The water soluble polymer binds the quat to the substrate and releases the quat when the substrate is wetted.

5 Thus, the wipe disclosed is a dry wipe, as opposed to a premoistened wipe.

Airlaid substrates have previously been utilized in premoistened wipes. Such airlaid substrates can exhibit some controlled fluid release properties. However, such substrates typically contain a binder material in order to bond the fibers of the substrate together. Binder materials can be undesirable because they can cause problems such as filming and streaking, especially on hard surfaces. Another potential problem with airlaid substrates that contain binders in premoistened wipes relates to the potential of the binder to decompose, depending on the liquid composition impregnated into the substrate, and thus cause the substrate to break apart over time.

15 It has therefore been desired to develop a substrate for a premoistened wipe that is capable of controlled fluid release, without having to utilize materials such as water swellable polymers and the like, while minimizing filming and streaking, especially on hard surfaces.

#### **SUMMARY OF THE INVENTION**

The present invention encompasses multi-layer substrates that are suitable for use in a premoistened wipe capable of controlled fluid release for treating or cleaning surfaces. The multi-layer substrates of the present invention generally comprise:

(a) at least one reservoir layer; wherein a first reservoir layer has a basis weight of at least about 5 gsm and comprises:

(i) from about 5% to about 100%, by weight of said first reservoir layer, of hydrophilic fibers; and

25 (ii) from about 0% to about 95% by weight of said first reservoir layer, of hydrophobic fibers;

wherein the total basis weight of said reservoir layer(s) is from about 10% to about 95% of the total basis weight of said multi-layer substrate; and

(b) at least one surface contacting layer; wherein a first surface contacting layer has a basis weight of at least about 5 gsm and comprises:

30 (i) from about 0% to about 95%, by weight of said first surface contacting layer, of hydrophilic fibers; and

- (ii) from about 5% to about 100%, by weight of said first surface contacting layer, of hydrophobic fibers;

wherein the total basis weight of said surface contacting layer(s) is from about 10% to about 95% of the total basis weight of said multi-layer substrate.

- 5 The reservoir layer(s) and surface contact layer(s) have certain blends of hydrophilic fibers and hydrophobic fibers, as well as certain basis weights, in order to provide a substrate that is capable of controlled fluid release.

The present invention further relates to premoistened wipes comprising the multi-layer substrates herein and a composition comprising a surfactant system, wherein the surfactant  
10 system comprises a surfactant selected from the group consisting of anionic surfactants, nonionic surfactants, amphoteric surfactants, zwitterionic surfactants, and mixtures thereof.

The present invention further relates to methods of treating or cleaning a surface, especially hard surfaces, with the premoistened wipes of the present invention.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

15 **FIG. 1a** is a top view of a substrate of the present invention.

**FIG. 1b** is a cross-sectional view of the substrate shown in **FIG. 1a** along line B-B'.

**FIG. 2** is a block diagram of the apparatus used in the Desorption Under Pressure Test Method described in Section V, *infra*.

20 **FIG. 3** is a graph of a Desorption Under Pressure curve (Lotion Loss vs. Pressure) at an Initial 2.2 X-Load.

**FIG. 4** is a graph of a Desorption Under Pressure curve (Lotion Loss vs. Pressure) at an Initial 3.2 X-Load.

#### **DETAILED DESCRIPTION OF THE INVENTION**

##### **I. SUBSTRATES**

25 The substrates of the present invention are particularly suitable for use in premoistened wipes. It has been found that the present substrates used in premoistened wipes are capable of controlled fluid release. Substrates, especially in premoistened wipes, that are capable of controlled fluid release provide several benefits that are important to consumers. For example, the wipe is able to clean larger surface areas because the cleaning solution is more efficiently  
30 distributed to the cleaning surface and is not unnecessarily wasted. This provides added value to the consumer. Another benefit of substrates for premoistened wipes capable of controlled fluid release is that the wipes do not feel as wet initially to the touch and, therefore, are aesthetically

more pleasing to a consumer since it does not get a consumer's hands as wet while using the wipe for cleaning surfaces.

5 An additional benefit relates to such premoistened wipes that are packaged in, for example, stacks and stored for a period of time. The lotion/fluid impregnated into the present substrates is able to be held at substantially a uniform level, so that the wipes maintain the correct amount of lotion in each wipe, even under forces such as gravity over time.

10 It has been found that a multi-layer substrate comprising a reservoir layer and a surface contact layer, wherein the reservoir layer and surface contact layer have certain blends of hydrophilic and hydrophobic fibers, can exhibit improved controlled fluid release. Also, the layers can have differing basis weights to further improve the controlled fluid release properties of the substrate.

15 The present substrates comprise a reservoir layer and at least one surface contacting layer, preferably at least two surface contacting layers. The reservoir and surface contacting layers have specific fiber blends and basis weights relatively to one another that result in a substrate suitable for use in premoistened wipes having controlled fluid release properties.

20 This controlled fluid release is achieved preferably without the use of water swellable polymers. Therefore, the substrates and premoistened wipes of the present invention are preferably essentially free of, or free of, water swellable polymers. In contrast to using such polymers, controlled fluid release herein is achieved by carefully selecting the hydrophilic/hydrophobic fiber blends and basis weights of the layers of the multi-layer substrates of the present invention.

25 Therefore, the substrates of the present invention, when used in premoistened wipes, are much more efficient in regard to fluid delivery and thus allow a consumer to maximize the use of the lotion impregnated on such substrates.

The multi-layer substrates herein relate to substrates with layers having certain blends of hydrophilic fibers and hydrophobic fibers.

30 As used herein, the term "hydrophilic" describes fibers, or surfaces of fibers, that are wettable by aqueous fluids (e.g., aqueous body fluids) deposited on these fibers. Hydrophilicity and wettability are typically defined in terms of contact angle and the surface tension of the fluids and solids involved. This is discussed in detail in the American Chemical Society publication entitled Contact Angle, Wettability and Adhesion, edited by Robert F. Gould (Copyright 1964). A fiber, or surface of a fiber, is said to be wetted by a fluid (i.e., hydrophilic)

when either the contact angle between the fluid and the fiber, or its surface, is less than 90°, or when the fluid tends to spread spontaneously across the surface of the fiber, both conditions normally co-existing. Conversely, a fiber or surface is considered to be hydrophobic if the contact angle is greater than 90° and the fluid does not spread spontaneously across the surface of the fiber.

Suitable hydrophilic fibers for use in the present invention include cellulosic fibers, modified cellulosic fibers, cotton, reconstituted or regenerated cellulosic fibers (e.g. rayon and lyocell fibers), hydrophilic nylon fibers (HYDROFIL®), polylactic acid fibers, and the like. Suitable hydrophilic fibers can also be obtained by hydrophilizing hydrophobic fibers, such as surfactant-treated or silica-treated thermoplastic fibers derived from, for example, polyolefins. Other hydrophilic fibers that can be used in the present substrates include "chemically stiffened cellulosic fibers", which are described in detail in U.S. Patent No. 5,855,572, which is incorporated herein by reference. Other hydrophilic fibers include "capillary channel fibers" such as those described in U.S. Pat. No. 5,200,248, to Thompson et al. and U.S. Pat. No. 5,268,229, to Phillips et al, both of which are incorporated by reference herein.

Suitable hydrophobic fibers utilized in the layers of the present substrates include, for example, synthetic fibers comprised of polyethylene, polypropylene, polyethylene terephthalate ("PET"), nylon, bicomponent fibers, or blends thereof.

#### A. RESERVOIR LAYER

The reservoir layer of the present substrate is designed to store a composition to be applied to a given surface, until it is desired to treat the surface. The reservoir layer is designed to have the ability to deliver the right amount of lotion (i.e. cleaning solution or composition) to the surface being treated or cleaned. If too much lotion is released, the lotion will be wasted and the premoistened wipe will not last long before running out of lotion. If too much lotion remains in the reservoir layer, then the lotion is not available to act upon the treated surface, thus wasting lotion since it is not being utilized to treat the surface. The reservoir layer therefore must be carefully designed to deliver an appropriate amount of composition to the surface to be treated.

As previously discussed, the layers of the multi-layer substrates herein comprise differing blends of hydrophilic and hydrophobic fibers. It has been found that the hydrophilic:hydrophobic fiber blend of the reservoir layer (and also the surface contact layer(s)) can be balanced in order to result in a substrate that is useful in premoistened wipes capable of controlled fluid release.

The reservoir layer herein typically comprises at least about 5%, preferably at least about 25%, and more preferably at least about 40%, by weight of the reservoir layer, of hydrophilic fibers; and typically less than about 100%, preferably less than about 80%, and more preferably less than about 50%, by weight of the reservoir layer, of hydrophilic fibers.

5        The reservoir layer herein typically further comprises at least about 0%, preferably at least about 20%, and more preferably at least about 50%, by weight of the reservoir layer, of hydrophobic fibers; and typically less than about 95%, preferably less than about 75%, and more preferably less than about 60%, by weight of the reservoir layer, of hydrophobic fibers.

10        The reservoir layer herein will also generally have a basis weight of at least about 5 grams per square meter ("gsm"), preferably at least about 15 gsm, and more preferably at least about 25 gsm. The basis weight of the reservoir layer will typically account for at least 10%, preferably at least about 20%, and more preferably at least about 35% of the total basis weight of the present substrate; and typically less than about 95%, preferably less than about 80%, and more preferably less than about 60% of the total basis weight of the present substrate.

15        The density of the reservoir layer will typically be from about 0.02 grams per cubic centimeter ("g/cc") to about 0.4 g/cc, preferably from about 0.05 g/cc to about 0.2 g/cc, and more preferably from about 0.075 g/cc to about 0.15 g/cc.

#### B. SURFACE CONTACT LAYER

20        The surface contact layer is designed to complement the reservoir layer in terms of delivering the lotion to the surface to be treated. The surface contact layer also has capacity to store a composition, such as in a premoistened wipe, although generally having a lesser fluid-holding capacity than the reservoir layer. Also, the surface contacting layer can provide other benefits such as enhancing the soil cleaning ability of the substrate and the dust, dirt, and/or hair pick-up of the substrates, and the premoistened wipes that incorporate the present substrates.

25        The surface contact layer is designed with a certain blend of hydrophilic and hydrophobic fibers such that, when combined with the reservoir layer to form a multi-layer substrate, the substrate is capable of controlled fluid release.

30        The surface contact layer herein typically comprises at least about 0%, preferably at least about 10%, and more preferably at least about 20%, by weight of the surface contact layer, of hydrophilic fibers; and typically less than about 95%, preferably less than about 75%, and more preferably less than about 50%, by weight of the surface contact layer, of hydrophilic fibers.

The surface contact layer herein typically further comprises at least about 5%, preferably at least about 25%, and more preferably at least about 50%, by weight of the surface contact layer, of hydrophobic fibers; and typically less than about 100%, preferably less than about 90%, and more preferably less than about 80%, by weight of the surface contact layer, of hydrophobic  
5 fibers.

The surface contact layer herein will also generally have a basis weight of at least about 5 gsm, preferably at least about 10 gsm, and more preferably at least about 20 gsm. The basis weight of the surface contact layer will typically account for at least 10%, preferably at least about 20%, and more preferably at least about 35% of the total basis weight of the present  
10 substrate; and typically less than about 95%, preferably less than about 80%, and more preferably less than about 60% of the total basis weight of the present substrate.

The density of the surface contact layer will typically be from about 0.02 g/cc to about 0.4 g/cc, preferably from about 0.05 g/cc to about 0.2 g/cc, and more preferably from about 0.075 g/cc to about 0.15 g/cc.

In a preferred embodiment, the multi-layer substrate of the present invention will comprise a first surface contact layer, a second surface contact layer, and a reservoir layer, wherein the reservoir layer is positioned between the first and second surface contact layers. Such a substrate thus comprises three layers. Preferably, such a multi-layer substrate is formed by thermal bonding together the three layers.  
15

The multi-layer substrates of the present invention can encompass a wide range of total basis weight. In preferred embodiments, the ratio of the basis weight of the reservoir layer to the basis weight of surface contacting layer(s) will typically range from about 20:1 to about 1:20, preferably from about 5:1 to about 1:5, and more preferably from about 1.5:1 to about 1:1.5.  
20

The substrates herein can be apertured; however, the substrates are preferably non-apertured, especially if they are used in premoistened wipes.  
25

The multi-layer substrates herein are comprised of at least two layers. Therefore, the present invention encompasses substrates having two layers, three layers, four layers, and so on. Preferably, the multi-layer substrate consists of three layers.

A variety of web forming technologies known in the art can be utilized to manufacture the reservoir and surface contact layers of the present substrates. Examples of suitable web forming processes include air laid, carded, cross lapped, spunbond, meltblown, wet laid, extruded, cast film, and combinations thereof. Preferably, the web forming technology used to  
30

manufacture the reservoir and surface contact layers herein is conventional carding technology. Thus the layers are preferably made of carded fibers.

In terms of combining the various layers herein to form the multi-layer substrate of the present invention, a variety of bonding technologies known in the art can be used to form the multi-layer substrates of the present invention. Examples of suitable bonding technologies include mechanically bonded, stitch bonded, needlepunched, needlefelted, spunlaced, jetlaced, hydroentangled, apertured, chemically bonded (resin, latex, powder), saturated, print bonded, spray bonded, foam bonded, thermal bonded, point bonded, ultrasonically welded, thermal bonded bicomponent fiber compositions, and combinations thereof. Preferably, the bonding technology utilized herein to combine the various layers of the present multi-layer substrate is thermal bonding. More preferably, the bonding technology is point thermal bonding, which results in an embossed pattern in the resulting multi-layer substrate. A preferred pattern is a 7-point pattern.

Preferably, the web forming technologies and bonding technologies utilized herein do not include binding materials that are incompatible with the compositions herein. Binding materials that are incompatible tend to decompose, dissolve, or disintegrate in the presence of the compositions herein. Thus the substrates herein preferably are essentially free of, or free of, such binders or binding agents. Examples of such binders include copolymers and latex-blends such as styrene-butadiene, polyvinyl acetate, polyvinyl alcohol, ethyl vinyl acetate, and the like. Such binders can be undesirable, especially in premoistened wipes, because they can cause filming and streaking problems on treated surfaces and can be subject to degradation over time (depending on the composition impregnated in the substrate), resulting in a weakening of the substrate of the premoistened wipe.

It is preferred that the various layers herein are bonded to one another via patterned thermal bonding. Patterned thermal bonding refers to a process of bonding a nonwoven web in a pattern by the application of heat and pressure. Pattern bonding typically is carried out at a temperature in a range of from about 80°C to about 180°C and a pressure in a range of from about 150 to about 1,000 pounds per linear inch (from about 59 to about 178 kg/cm). The pattern employed typically will have from about 10 to about 250 bonds/inch<sup>2</sup> (1-40 bonds/cm<sup>2</sup>) covering from about 5 to about 30 percent of the wipe surface area. Such pattern bonding is accomplished in accordance with known procedures. See, for example, U.S. Design Pat. No. 239,566 to Vogt, U.S. Design Pat. No. 264,512 to Rogers, U.S. Pat. No. 3,855,046 to Hansen et al., and U.S. Pat.



No. 4,493,868, *supra*, for illustrations of bonding patterns and a discussion of bonding procedures, which patents are incorporated herein by reference.

#### Preferred Multi-Layer Substrate

A preferred multi-layer substrate of the present invention is shown in **FIGS. 1a** and **1b**.  
5 This preferred substrate **100** is a carded thermal bonded nonwoven substrate comprising three carded fiber layers (two surface contact layers **110** and one reservoir layer **115**, positioned between the two surface contact layers **110**) thermally bonded together with a 7-point pattern and a total basis weight of 70 gsm. The overall fiber composition of this preferred substrate is about 52% hydrophilic polypropylene (2.2 denier per filament ("dpf"), 38 mm length, FiberVisions  
10 Americas Type 193), about 31% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099), and about 18% PET (6.0 dpf, 50mm, Wellman, Inc. Type 204). Average caliper for the composite web substrate is about 0.63 mm and it has a density of 0.108 g/cm<sup>3</sup>.

The multi-layer substrate **100** is thermally bonded with a plurality of thermal point bonds **105**. The thermal point bonds **105** form a continuous 7-point pattern. **FIG. 1b** depicts a cross-  
15 sectional view of the multi-layer substrate **100** shown in **FIG. 1a**. The two surface contact layers **110** are made of a homogenous blend of about 60% hydrophilic polypropylene (2.2 dpf, 38 mm length, FiberVisions Americas Type 193), about 10% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099), and about 30% PET (6.0 dpf, 50mm, Wellman, Inc. Type 204) and each surface contact layer **110** has a basis weight of about 20.5 gsm. The reservoir  
20 layer **115**, positioned between the two surface contact layers **110**, is made of a homogenous blend of about 40% hydrophilic polypropylene (2.2 dpf, 38 mm length, FiberVisions Americas Type 193) and about 60% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099) with a basis weight of about 29.0 gsm.

The preferred multi-layer substrate shown in **FIGS. 1a** and **1b** is made according to the  
25 following process. The reservoir layer **115** is made by blending (by weight) about 40% hydrophilic polypropylene (2.2 dpf, 38 mm length, FiberVisions Americas Type 193) and about 60% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099). These blends are fed into two cards (about 14.5 gsm per card) to form a reservoir layer **115** with an overall basis weight of about 29.0 gsm. After carding, the reservoir layer **115** is embossed with a  
30 continuous 7-point pattern at about 300°F and about 540 pounds per square inch ("psi") and wound for later use in forming the multi-layer substrate **100**.

The two surface contact layers **110** are made by blending (by weight) of about 60% hydrophilic polypropylene (2.2 dpf, 38 mm length, FiberVisions Americas Type 193), about 10% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099), and about 30% PET (6.0 dpf, 50mm, Wellman, Inc. Type 204). These blends are fed into two cards (top and bottom, about 20.5 gsm per card). In forming the multi-layer substrate **100**: (1) the bottom carded fiber layer is placed on a moving conveyor, (2) the pre-made center reservoir layer is unwound on top of the bottom carded fiber layer, and (3) the top carded fiber layer is placed on top of the pre-formed center web and the bottom carded fiber layer. These three fibrous web layers are thermally embossed together with a continuous 7-point pattern at about 300°F and about 540 psi. The resultant web formed has an average basis weight of about 70 gsm, an average caliper of about 0.63 mm, and an average density of about 0.108 g/cm<sup>3</sup>.

## II. COMPOSITION

The composition of the present invention for incorporation onto a substrate of the present invention is preferably suitable for use as a cleaning and/or disinfecting composition. The compositions may be formulated in any suitable form for example as a solid, paste or liquid. In the case where the compositions according to the present invention are formulated as solids, they can be applied to the substrate as a solid or alternatively can be mixed with an appropriate solvent, typically water, before application to the substrate. Where the composition is in liquid form, the compositions are preferably, but not necessarily, formulated as aqueous compositions. Liquid compositions are preferred herein for convenience of use.

The compositions herein generally comprise a surfactant system and/or a solvent system, and optional ingredients. The surfactant system preferably comprises a surfactant selected from the group consisting of anionic surfactants, nonionic surfactants, amphoteric surfactants, zwitterionic surfactants, and mixtures thereof. The solvent system preferably comprises a solvent or mixtures thereof.

In a preferred embodiment the liquid compositions according to the present invention are aqueous compositions typically comprising from 50% to 99.9%, by weight of the total composition, of water, preferably from 70% to 99%, and more preferably from 80% to 99%. These aqueous compositions preferably have a pH as is of not more than 13.0, more preferably from 1 to 11, and most preferably from 2 to 10. The pH of the compositions can be adjusted by using organic or inorganic acids, or alkalinising agents.

Suitable organic acids include citric acid, lactic acid and mixtures thereof. In a preferred embodiment of the present invention, the composition herein comprises an organic acid, preferably citric acid, lactic acid or a mixture thereof, and most preferably citric acid.

Compositions suitable for use as a cleaning composition preferably have pH in the range of from 5 to 13, more preferably from 7 to 13 and most preferably from 8 to 10. Compositions for use as disinfecting compositions preferably have a pH in the range of from 0 to 7, more preferably from 1 to 5 and most preferably from 2 to 4.

5 In another preferred embodiment according to the present invention, the liquid compositions herein are substantially free, preferably free, of pH modifying agents. Preferably, the compositions being substantially free, preferably free, of pH modifying agents have a pH of from 6.5 to 7.5, more preferably of from 6.8 to 7.2.

By "substantially free" it is meant herein, that the liquid composition comprises less than 10 1%, preferably less than 0.5%, more preferably less than 0.1%, and even more preferably less than 0.05%, by weight of the total composition of a pH modifying agent.

By "pH modifying agents" it is meant herein, ingredients solely added for the purpose of modifying the pH of the compositions described as for example acids, sources of alkalinity, buffers and the like and mixtures thereof.

15 By acids it is meant herein any organic acid, as for example, citric acid, maleic acid, lactic acid, glycolic acid, succinic acid, glutaric acid and adipic acid, and mixtures thereof and/or any inorganic acid, as for example, sulphuric acid, chloridric acid, phosphoric acid, nitric acid, and mixtures thereof. By sources of alkalinity for use herein are the caustic alkalis such as sodium hydroxide, potassium hydroxide and/or lithium hydroxide, and/or the alkali metal oxides 20 such as sodium and/or potassium oxide, and/or other suitable sources of alkalinity including ammonia, ammonium carbonate and hydrogen carbonate.

It has been observed that when a substrate incorporating a liquid composition as described herein is used to clean and/or disinfect an animate or inanimate surface, wherein said liquid composition is substantially free, preferably free, of pH modifying agents, streaking and/or 25 spotting benefits can be observed. Indeed, the absence of pH modifying agents in the liquid compositions herein can contribute to reduce or even prevent the formation of streaks and/or spots on a surface cleaned and/or disinfected with a substrate incorporating a liquid composition as described herein being substantially free of pH modifying agents as compared to a similar surface cleaned and/or disinfected with a substrate incorporating a liquid composition not being 30 substantially free of pH modifying agents. By reducing or even preventing the formation of streaks and/or spots on said cleaned and/or disinfected surface, shine benefits are provided to said surface.

#### A. SURFACTANT SYSTEM

35 According to the present invention, the premoistened wipes comprise a substrate incorporating a composition comprising a surfactant system. The surfactant system herein

comprises a surfactant selected from the group consisting of anionic surfactants, nonionic surfactants, amphoteric surfactants, zwitterionic surfactants, and mixtures thereof. In a preferred embodiment, the surfactant system consists of a synergistic system comprising at least three surfactants, namely an anionic, a nonionic and an amphoteric and/or zwitterionic surfactant.

- 5           The compositions preferably comprises the surfactant system at a level by weight of the total composition of from 0.05-20%, more preferably from 0.1-5% and most preferably from 0.2-3%.

i.           ANIONIC SURFACTANTS

10           Suitable anionic surfactants for use herein include alkyl sulphates. Suitable alkyl sulphates for use herein include water-soluble salts or acids of the formula  $\text{ROSO}_3\text{M}$  wherein R is a  $\text{C}_6\text{-C}_{24}$  linear or branched, saturated or unsaturated alkyl group, preferably a  $\text{C}_8\text{-C}_{20}$  alkyl group, more preferably a  $\text{C}_8\text{-C}_{16}$  alkyl group and most preferably a  $\text{C}_{10}\text{-C}_{14}$  alkyl group, and M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium), or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof, and the like).

15           Suitable anionic surfactants for use herein further include alkyl aryl sulphates. Suitable alkyl aryl sulphates for use herein include water-soluble salts or acids of the formula  $\text{ROSO}_3\text{M}$  wherein R is an aryl, preferably a benzyl, substituted by a  $\text{C}_6\text{-C}_{24}$  linear or branched saturated or unsaturated alkyl group, preferably a  $\text{C}_8\text{-C}_{20}$  alkyl group and more preferably a  $\text{C}_{10}\text{-C}_{16}$  alkyl group and M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium and the like) or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof, and the like).

20           Suitable anionic surfactants for use herein further include alkoxyated sulphate surfactants. Suitable alkoxyated sulphate surfactants for use herein are according to the formula  $\text{RO(A)}_m\text{SO}_3\text{M}$  wherein R is an unsubstituted  $\text{C}_6\text{-C}_{24}$  alkyl, hydroxyalkyl or alkyl aryl group, having a linear or branched  $\text{C}_6\text{-C}_{24}$  alkyl component, preferably a  $\text{C}_{12}\text{-C}_{20}$  alkyl or hydroxyalkyl, more preferably  $\text{C}_{12}\text{-C}_{18}$  alkyl or hydroxyalkyl, A is an ethoxy or propoxy or butoxy unit or a mixture thereof, m is greater than zero, typically between 0.5 and 6, more preferably between 0.5 and 3, and M is H or a cation which can be, for example, a metal cation (e.g., sodium, potassium, lithium, calcium, magnesium, etc.), ammonium or substituted-ammonium cation. Alkyl ethoxyated sulphates, alkyl butoxyated sulphates as well as alkyl

propoxylated sulphates are contemplated herein. Specific examples of substituted ammonium cations include methyl-, dimethyl-, trimethyl-ammonium and quaternary ammonium cations, such as tetramethyl-ammonium, dimethyl piperdinium and cations derived from alkanolamines such as ethylamine, diethylamine, triethylamine, mixtures thereof, and the like. Exemplary surfactants are C<sub>12</sub>-C<sub>18</sub> alkyl polyethoxylate (1.0) sulphate (C<sub>12</sub>-C<sub>18</sub>E(1.0)SM), C<sub>12</sub>-C<sub>18</sub> alkyl polyethoxylate (2.25) sulphate (C<sub>12</sub>-C<sub>18</sub>E(2.25)SM), C<sub>12</sub>-C<sub>18</sub> alkyl polyethoxylate (3.0) sulphate (C<sub>12</sub>-C<sub>18</sub>E(3.0)SM), and C<sub>12</sub>-C<sub>18</sub> alkyl polyethoxylate (4.0) sulphate (C<sub>12</sub>-C<sub>18</sub>E(4.0)SM), wherein M is conveniently selected from sodium and potassium.

Suitable anionic surfactants for use herein further include alkyl sulphonates. Suitable alkyl sulphonates for use herein include water-soluble salts or acids of the formula RSO<sub>3</sub>M wherein R is a C<sub>6</sub>-C<sub>20</sub> linear or branched, saturated or unsaturated alkyl group, preferably a C<sub>8</sub>-C<sub>18</sub> alkyl group and more preferably a C<sub>14</sub>-C<sub>17</sub> alkyl group, and M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium), or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof, and the like).


Suitable anionic surfactants for use herein further include alkyl aryl sulphonates. Suitable alkyl aryl sulphonates for use herein include water-soluble salts or acids of the formula RSO<sub>3</sub>M wherein R is an aryl, preferably a benzyl, substituted by a C<sub>6</sub>-C<sub>20</sub> linear or branched saturated or unsaturated alkyl group, preferably a C<sub>8</sub>-C<sub>18</sub> alkyl group and more preferably a C<sub>9</sub>-C<sub>14</sub> alkyl group, and M is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium and the like) or ammonium or substituted ammonium (e.g., methyl-, dimethyl-, and trimethyl ammonium cations and quaternary ammonium cations, such as tetramethyl-ammonium and dimethyl piperdinium cations and quaternary ammonium cations derived from alkylamines such as ethylamine, diethylamine, triethylamine, and mixtures thereof, and the like).

Particularly suitable alkyl sulphonates include C<sub>14</sub>-C<sub>17</sub> paraffin sulphonate like Hostapur ® SAS commercially available from Hoechst. An example of commercially available alkyl aryl sulphonate is Lauryl aryl sulphonate from Su.Ma.. Particularly preferred alkyl aryl sulphonates are alkyl benzene sulphonates commercially available under trade name Nansa® available from Albright & Wilson.

Suitable anionic surfactants for use herein further include alkoxyated sulphonate surfactants. Suitable alkoxyated sulphonate surfactants for use herein are according to the formula R(A)<sub>m</sub>SO<sub>3</sub>M wherein R is an unsubstituted C<sub>6</sub>-C<sub>20</sub> alkyl, hydroxyalkyl or alkyl aryl group, having a linear or branched C<sub>6</sub>-C<sub>20</sub> alkyl component, preferably a C<sub>12</sub>-C<sub>20</sub> alkyl or

hydroxyalkyl, more preferably  $C_{12}$ - $C_{18}$  alkyl or hydroxyalkyl, A is an ethoxy or propoxy or butoxy unit, m is greater than zero, typically between 0.5 and 6, more preferably between 0.5 and 3, and M is H or a cation which can be, for example, a metal cation (e.g., sodium, potassium, lithium, calcium, magnesium, etc.), ammonium or substituted-ammonium cation. Alkyl ethoxylated sulphonates, alkyl butoxylated sulphonates as well as alkyl propoxylated sulphonates are contemplated herein. Specific examples of substituted ammonium cations include methyl-, dimethyl-, trimethyl-ammonium and quaternary ammonium cations, such as tetramethyl-ammonium, dimethyl piperdinium and cations derived from alkanolamines such as ethylamine, diethylamine, triethylamine, mixtures thereof, and the like. Exemplary surfactants are  $C_{12}$ - $C_{18}$  alkyl polyethoxylate (1.0) sulphonate ( $C_{12}$ - $C_{18}E(1.0)SM$ ),  $C_{12}$ - $C_{18}$  alkyl polyethoxylate (2.25) sulphonate ( $C_{12}$ - $C_{18}E(2.25)SM$ ),  $C_{12}$ - $C_{18}$  alkyl polyethoxylate (3.0) sulphonate ( $C_{12}$ - $C_{18}E(3.0)SM$ ), and  $C_{12}$ - $C_{18}$  alkyl polyethoxylate (4.0) sulphonate ( $C_{12}$ - $C_{18}E(4.0)SM$ ), wherein M is conveniently selected from sodium and potassium. Particularly suitable alkoxyated sulphonates include alkyl aryl polyether sulphonates like Triton X-200® commercially available from Union Carbide.

Suitable anionic surfactants for use herein further include  $C_6$ - $C_{20}$  alkyl alkoxyated linear or branched diphenyl oxide disulphonate surfactants. Suitable  $C_6$ - $C_{20}$  alkyl alkoxyated linear or branched diphenyl oxide disulphonate surfactants for use herein are according to the following formula:

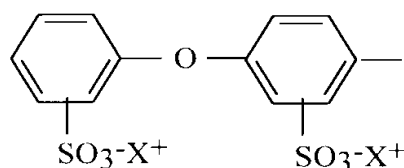

wherein R is a  $C_6$ - $C_{20}$  linear or branched, saturated or unsaturated alkyl group, preferably a  $C_6$ - $C_{18}$  alkyl group and more preferably a  $C_6$ - $C_{14}$  alkyl group, and  $X^+$  is H or a cation, e.g., an alkali metal cation (e.g., sodium, potassium, lithium, calcium, magnesium and the like). Particularly suitable  $C_6$ - $C_{20}$  alkyl alkoxyated linear or branched diphenyl oxide disulphonate surfactants to be used herein are the  $C_{12}$  branched diphenyl oxide disulphonic acid and  $C_{16}$  linear diphenyl oxide disulphonate sodium salt respectively commercially available by DOW under the trade name Dowfax 2A1® and Dowfax 8390®.

Other suitable anionic surfactants for use herein include alkyl-carboxylates. Other anionic surfactants can include salts (including, for example, sodium, potassium, ammonium, and substituted ammonium salts such as mono-, di- and triethanolamine salts) of soap,  $C_8$ - $C_{24}$  olefinsulfonates, sulfonated polycarboxylic acids prepared by sulfonation of the pyrolyzed

product of alkaline earth metal citrates, e.g., as described in British Patent Specification No. 1,082,179; acyl glycerol sulfonates, fatty oleyl glycerol sulfates, alkyl phenol ethylene oxide ether sulfates, alkyl phosphates, isethionates such as the acyl isethionates, N-acyl taurates, alkyl succinamates and sulfosuccinates, monoesters of sulfosuccinate (especially saturated and unsaturated C<sub>12</sub>-C<sub>18</sub> monoesters) diesters of sulfosuccinate (especially saturated and unsaturated C<sub>6</sub>-C<sub>14</sub> diesters), acyl sarcosinates, sulfates of alkylpolysaccharides such as the sulfates of alkylpolyglucoside (the nonionic nonsulfated compounds being described below), branched primary alkyl sulfates, alkyl polyethoxy carboxylates such as those of the formula  $RO(CH_2CH_2O)_kCH_2COO-M^+$  wherein R is a C<sub>8</sub>-C<sub>22</sub> alkyl, k is an integer from 0 to 10, and M is a soluble salt-forming cation. Resin acids and hydrogenated resin acids are also suitable, such as rosin, hydrogenated rosin, and resin acids and hydrogenated resin acids present in or derived from tall oil. Further examples are given in "Surface Active Agents and Detergents" (Vol. I and II by Schwartz, Perry and Berch). A variety of such surfactants are also generally disclosed in U.S. Patent 3,929,678, issued December 30, 1975 to Laughlin, et al. at Column 23, line 58 through Column 29, line 23.

In one preferred embodiment, preferred anionic surfactants for use herein are the C<sub>8</sub>-C<sub>16</sub> alkyl sulfonates, C<sub>8</sub>-C<sub>16</sub> alkyl sulfates, including branched alkyl sulphates, C<sub>8</sub>-C<sub>16</sub> alkyl alkoxyated sulfates (e.g., C<sub>8</sub>-C<sub>16</sub> alkyl ethoxyated sulfates), C<sub>8</sub>-C<sub>16</sub> alkyl alkoxyated sulphonates and mixtures thereof. Such anionic surfactants are preferred herein as it has been found that they contribute to the disinfecting properties of a disinfecting composition herein. For example, C<sub>8</sub>-C<sub>16</sub> alkyl sulfate acts by disorganizing the bacteria cell membrane, inhibiting enzymatic activities, interrupting the cellular transport and/or denaturing cellular proteins. Indeed, it is speculated that the improved disinfecting performance further associated with the addition of an anionic surfactant, especially a C<sub>8</sub>-C<sub>16</sub> alkyl sulfonate, a C<sub>8</sub>-C<sub>16</sub> alkyl sulfate and/or a C<sub>8</sub>-C<sub>16</sub> alkyl alkoxyated sulfate, in a composition according to the present invention, is likely due to multiple mode of attack of said surfactant against the bacteria.

In a second preferred embodiment, the anionic surfactant is selected from the group consisting of: C<sub>6</sub>-24 alkyl sulphates; C<sub>6</sub>-24 alkyl aryl sulphates; C<sub>6</sub>-24 alkyl alkoxyated sulphates; C<sub>6</sub>-24 alkyl sulphonates, including paraffin sulphonates; C<sub>6</sub>-24 alkyl aryl sulphonates; C<sub>6</sub>-24 alkyl alkoxyated sulphonates; C<sub>6</sub>-C<sub>24</sub> alkyl alkoxyated linear or branched diphenyl oxide disulphonates; naphthalene sulphonates; and mixtures thereof. More preferably the anionic surfactant is selected from the group consisting of: C<sub>6</sub>-24 alkyl sulphonates; C<sub>6</sub>-24 alkyl sulphates; C<sub>6</sub>-24 alkyl alkoxyated sulphates; C<sub>6</sub>-24 alkyl aryl sulphonates; and mixtures thereof. Even more preferably the anionic surfactant for use herein is a paraffin sulphonate. Most preferably the anionic surfactant for use herein is a C<sub>14</sub>-C<sub>17</sub> paraffin sulphonate.

In a third preferred embodiment the anionic surfactant is a branched alkyl sulphate surfactant. Branched alkyl sulphate is herein defined to mean a an alkyl sulfate comprising a sulfate group and a carbon chain of preferably from 2 to 20, more preferably from 2 to 16, most preferably from 2 to 8 carbon atoms. The carbon chain of the branched alkyl sulfate comprises at least one branching group attached to the carbon chain. The branching group is selected from the group consisting of an alkyl group having from 1 to 20 , more preferably from 1 to 10 and most preferably from 1 to 4 carbon atoms. The branching group may be located at any position along the alkyl chain of the branched alkyl sulfate. More preferably the branching group is located at position from 1 to 4 along the alkyl chain. The sulfate group can be at any point along the length of the alkyl chain, most preferable at a terminus.

Suitable preferred branched alkyl sulfates include those available from Albright & Wilson under the tradename Empicol 0585/A.

## ii. NONIONIC SURFACTANTS

Suitable nonionic surfactants for use herein are fatty alcohol ethoxylates and/or propoxylates which are commercially available with a variety of fatty alcohol chain lengths and a variety of ethoxylation degrees. Indeed, the HLB values of such alkoxyated nonionic surfactants depend essentially on the chain length of the fatty alcohol, the nature of the alkoxylation and the degree of alkoxylation. Surfactant catalogues are available which list a number of surfactants, including nonionics, together with their respective HLB values. Preferred nonionic surfactants for one embodiment are those having an average HLB from 8 to 20, more preferably from 10 to 18, most preferably from 11 to 16. These hydrophobic nonionic surfactants have been found to provide good grease cutting properties.

Preferred hydrophobic nonionic surfactants for use in the compositions according to the present invention are surfactants having an HLB below 16 and being according to the formula  $RO-(C_2H_4O)_n(C_3H_6O)_mH$ , wherein R is a  $C_6$  to  $C_{22}$  alkyl chain or a  $C_6$  to  $C_{28}$  alkyl benzene chain, and wherein  $n+m$  is from 0 to 20 and  $n$  is from 0 to 15 and  $m$  is from 0 to 20, preferably  $n+m$  is from 1 to 15 and,  $n$  and  $m$  are from 0.5 to 15, more preferably  $n+m$  is from 1 to 10 and,  $n$  and  $m$  are from 0 to 10. The preferred R chains for use herein are the  $C_8$  to  $C_{22}$  alkyl chains. Accordingly, suitable hydrophobic nonionic surfactants for use herein are Dobanol<sup>®</sup> 91-2.5 (HLB= 8.1; R is a mixture of  $C_9$  and  $C_{11}$  alkyl chains,  $n$  is 2.5 and  $m$  is 0), or Lutensol<sup>®</sup> TO3 (HLB=8; R is a  $C_{13}$  alkyl chains,  $n$  is 3 and  $m$  is 0), or Lutensol<sup>®</sup> AO3 (HLB=8; R is a mixture of  $C_{13}$  and  $C_{15}$  alkyl chains,  $n$  is 3 and  $m$  is 0), or Tergitol<sup>®</sup> 25L3 (HLB= 7.7; R is in the range of  $C_{12}$  to  $C_{15}$  alkyl chain length,  $n$  is 3 and  $m$  is 0), or Dobanol<sup>®</sup> 23-3 (HLB=8.1; R is a mixture of  $C_{12}$  and  $C_{13}$  alkyl chains,  $n$  is 3 and  $m$  is 0), or Dobanol<sup>®</sup> 23-2 (HLB=6.2; R is a mixture of  $C_{12}$  and  $C_{13}$  alkyl chains,  $n$  is 2 and  $m$  is 0), or Dobanol<sup>®</sup> 45-7 (HLB=11.6; R is a mixture of



C<sub>14</sub> and C<sub>15</sub> alkyl chains, n is 7 and m is 0) Dobanol<sup>®</sup> 23-6.5 (HLB=11.9; R is a mixture of C<sub>12</sub> and C<sub>13</sub> alkyl chains, n is 6.5 and m is 0), or Dobanol<sup>®</sup> 25-7 (HLB=12; R is a mixture of C<sub>12</sub> and C<sub>15</sub> alkyl chains, n is 7 and m is 0), or Dobanol<sup>®</sup> 91-5 (HLB=11.6; R is a mixture of C<sub>9</sub> and C<sub>11</sub> alkyl chains, n is 5 and m is 0), or Dobanol<sup>®</sup> 91-6 (HLB=12.5 ; R is a mixture of C<sub>9</sub> and C<sub>11</sub> alkyl chains, n is 6 and m is 0), or Dobanol<sup>®</sup> 91-8 (HLB=13.7 ; R is a mixture of C<sub>9</sub> and C<sub>11</sub> alkyl chains, n is 8 and m is 0), Dobanol<sup>®</sup> 91-10 (HLB=14.2 ; R is a mixture of C<sub>9</sub> to C<sub>11</sub> alkyl chains, n is 10 and m is 0), or mixtures thereof. Preferred herein are Dobanol<sup>®</sup> 91-2.5 , or Lutensol<sup>®</sup> TO3, or Lutensol<sup>®</sup> AO3, or Tergitol<sup>®</sup> 25L3, or Dobanol<sup>®</sup> 23-3, or Dobanol<sup>®</sup> 23-2, or mixtures thereof. These Dobanol<sup>®</sup> surfactants are commercially available from SHELL. These Lutensol<sup>®</sup> surfactants are commercially available from BASF and these Tergitol<sup>®</sup> surfactants are commercially available from UNION CARBIDE.

In a preferred embodiment the nonionic surfactant herein is an alkoxyated nonionic surfactant according to the formula RO-(A)<sub>n</sub>H, wherein : R is a C<sub>6</sub> to C<sub>22</sub>, preferably a C<sub>8</sub> to C<sub>22</sub>, more preferably a C<sub>9</sub> to C<sub>14</sub> alkyl chain, or a C<sub>6</sub> to C<sub>28</sub> alkyl benzene chain; A is an ethoxy or propoxy or butoxy unit; and wherein n is from 0 to 20, preferably from 1 to 15 and, more preferably from 2 to 15 even more preferably from 2 to 12 and most preferably from 4 to 10. Preferred R chains for use herein are the C<sub>8</sub> to C<sub>22</sub> alkyl chains. Even more preferred R chains for use herein are the C<sub>9</sub> to C<sub>12</sub> alkyl chains. Ethoxy/butoxylated, ethoxy/propoxylated, butoxy/propoxylated and ethoxy/butoxy/propoxylated nonionic surfactants may also be used herein. Preferred alkoxyated nonionic surfactants are ethoxylated nonionic surfactants.

Suitable alkylpolysaccharides for use herein are disclosed in U.S. Pat. No. 4,565,647, Llenado, issued Jan. 21, 1986, having a hydrophobic group containing from about 6 to about 30 carbon atoms, preferably from about 10 to about 16 carbon atoms and a polysaccharide, e.g., a polyglycoside, hydrophilic group. For acidic or alkaline cleaning compositions/solutions suitable for use in no-rinse methods, the preferred alkyl polysaccharide preferably comprises a broad distribution of chain lengths, as these provide the best combination of wetting, cleaning, and low residue upon drying. This "broad distribution" is defined by at least about 50% of the chainlength mixture comprising from about 10 carbon atoms to about 16 carbon atoms. Preferably, the alkyl group of the alkyl polysaccharide consists of a mixtures of chainlength, preferably from about 6 to about 18 carbon atoms, more preferably from about 8 to about 16 carbon atoms, and hydrophilic group containing from about one to about 1.5 saccharide, preferably glucoside, groups per molecule. This "broad chainlength distribution" is defined by at least about 50% of the chainlength mixture comprising from about 10 carbon atoms to about 16 carbon atoms. A broad mixture of chain lengths, particularly C<sub>8</sub>-C<sub>16</sub>, is highly desirable relative to narrower range chain length mixtures, and particularly versus lower (i.e., C<sub>8</sub>-C<sub>10</sub> or C<sub>8</sub>-C<sub>12</sub>)

chainlength alkyl polyglucoside mixtures. It is also found that the preferred C<sub>8-16</sub> alkyl polyglucoside provides much improved perfume solubility versus lower and narrower chainlength alkyl polyglucosides, as well as other preferred surfactants, including the C<sub>8-C14</sub> alkyl ethoxylates. Any reducing saccharide containing 5 or 6 carbon atoms can be used, e.g., glucose, galactose and galactosyl moieties can be substituted for the glucosyl moieties. (optionally the hydrophobic group is attached at the 2-, 3-, 4-, etc. positions thus giving a glucose or galactose as opposed to a glucoside or galactoside.) The intersaccharide bonds can be, e.g., between the one position of the additional saccharide units and the 2-, 3-, 4-, and/or 6- positions on the preceding saccharide units. The glycosyl is preferably derived from glucose.

Optionally, and less desirably, there can be a polyalkyleneoxide chain joining the hydrophobic moiety and the polysaccharide moiety. The preferred alkyleneoxide is ethylene oxide. Typical hydrophobic groups include alkyl groups, either saturated or unsaturated, branched or unbranched containing from 8 to 18, preferably from 10 to 16, carbon atoms. Preferably, the alkyl group is a straight-chain saturated alkyl group. The alkyl group can contain up to about 3 hydroxyl groups and/or the polyalkyleneoxide chain can contain up to about 10, preferably less than 5, alkyleneoxide moieties. Suitable alkyl polysaccharides are octyl, nonyldecyl, undecyldodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, and octadecyl, di-, tri-, tetra-, penta-, and hexagluco- and/or galactosides. Suitable mixtures include coconut alkyl, di-, tri-, tetra-, and pentagluco- and tallow alkyl tetra-, penta- and hexagluco- and/or galactosides.

To prepare these compounds, the alcohol or alkylpolyethoxy alcohol is formed first and then reacted with glucose, or a source of glucose, to form the glucoside (attachment at the 1-position). The additional glycosyl units can then be attached between their 1-position and the preceding glycosyl units 2-, 3-, 4- and/or 6-position, preferably predominantly the 2-position.

In the alkyl polyglycosides, the alkyl moieties can be derived from the usual sources like fats, oils or chemically produced alcohols while their sugar moieties are created from hydrolyzed polysaccharides. Alkyl polyglycosides are the condensation product of fatty alcohol and sugars like glucose with the number of glucose units defining the relative hydrophilicity. As discussed above, the sugar units can additionally be alkoxyated either before or after reaction with the fatty alcohols. Such alkyl polyglycosides are described in detail in WO 86/05199 for example. Technical alkyl polyglycosides are generally not molecularly uniform products, but represent mixtures of alkyl groups and mixtures of monosaccharides and different oligosaccharides. Alkyl polyglycosides (also sometimes referred to as "APG's") are preferred for the purposes of the invention since they provide additional improvement in surface appearance relative to other surfactants. The glycoside moieties are preferably glucose moieties. The alkyl substituent is preferably a saturated or unsaturated alkyl moiety containing from about 8 to about 18 carbon


atoms, preferably from about 8 to about 10 carbon atoms or a mixture of such alkyl moieties. C<sub>8</sub>-C<sub>16</sub> alkyl polyglucosides are commercially available (e.g., Simusol<sup>®</sup> surfactants from Seppic Corporation, 75 Quai d'Orsay, 75321 Paris, Cedex 7, France, and Glucopon<sup>®</sup>425 available from Henkel. However, it has been found that purity of the alkyl polyglucoside can also impact performance, particularly end result for certain applications, including daily shower product technology. In the present invention, the preferred alkyl polyglucosides are those which have been purified enough for use in personal cleansing. Most preferred are "cosmetic grade" alkyl polyglucosides, particularly C<sub>8</sub> to C<sub>16</sub> alkyl polyglucosides, such as Plantaren 2000<sup>®</sup>, Plantaren 2000 N<sup>®</sup>, and Plantaren 2000 N UP<sup>®</sup>, available from Henkel Corporation (Postfach 101100, D 40191 Dusseldorf, Germany).

### iii. AMPHOTERIC / ZWITTERIONIC SURFACTANTS

Suitable amphoteric surfactants for use herein include amine oxides having the following formula R<sub>1</sub>R<sub>2</sub>R<sub>3</sub>NO wherein each of R<sub>1</sub>, R<sub>2</sub> and R<sub>3</sub> is independently a saturated substituted or unsubstituted, linear or branched hydrocarbon chains of from 1 to 30 carbon atoms. Preferred amine oxide surfactants to be used according to the present invention are amine oxides having the following formula R<sub>1</sub>R<sub>2</sub>R<sub>3</sub>NO wherein R<sub>1</sub> is an hydrocarbon chain comprising from 1 to 30 carbon atoms, preferably from 6 to 20, more preferably from 8 to 16, most preferably from 8 to 12, and wherein R<sub>2</sub> and R<sub>3</sub> are independently substituted or unsubstituted, linear or branched hydrocarbon chains comprising from 1 to 4 carbon atoms, preferably from 1 to 3 carbon atoms, and more preferably are methyl groups. R<sub>1</sub> may be a saturated substituted or unsubstituted linear or branched hydrocarbon chain.

Suitable amine oxides for use herein are for instance natural blend C<sub>8</sub>-C<sub>10</sub> amine oxides as well as C<sub>12</sub>-C<sub>16</sub> amine oxides commercially available from Hoechst and Clariant.

Suitable zwitterionic surfactants for use herein contain both cationic and anionic hydrophilic groups on the same molecule at a relatively wide range of pH's. The typical cationic group is a quaternary ammonium group, although other positively charged groups like phosphonium, imidazolium and sulfonium groups can be used. The typical anionic hydrophilic groups are carboxylates and sulfonates, although other groups like sulfates, phosphonates, and the like can be used. A generic formula for some zwitterionic surfactants to be used herein is




wherein R<sub>1</sub> is a hydrophobic group; R<sub>2</sub> and R<sub>3</sub> are each C<sub>1</sub>-C<sub>4</sub> alkyl, hydroxy alkyl or other substituted alkyl group which can also be joined to form ring structures with the N; R<sub>4</sub> is a moiety joining the cationic nitrogen atom to the hydrophilic group and is typically an alkylene, hydroxy alkylene, or polyalkoxy group containing from 1 to 10 carbon atoms; and X is the

hydrophilic group which is preferably a carboxylate or sulfonate group. Preferred hydrophobic groups R<sub>1</sub> are alkyl groups containing from 1 to 24, preferably less than 18, more preferably less than 16 carbon atoms. The hydrophobic group can contain unsaturation and/or substituents and/or linking groups such as aryl groups, amido groups, ester groups and the like. In general, the simple alkyl groups are preferred for cost and stability reasons.

Highly preferred zwitterionic surfactants include betaine and sulphobetaine surfactants, functionalized betaines such as acyl betaines, alkyl imidazoline alanine betaines, glycine betaines, derivatives thereof and mixtures thereof. Said betaine or sulphobetaine surfactants are preferred herein as they help disinfection by increasing the permeability of the bacterial cell wall, thus allowing other active ingredients to enter the cell.

Furthermore, due to the mild action profile of said betaine or sulphobetaine surfactants, they are particularly suitable for the cleaning of delicate surfaces, e.g., delicate laundry or surfaces in contact with food and/or babies. Betaine and sulphobetaine surfactants are also extremely mild to the skin and/or surfaces to be treated.


Suitable betaine and sulphobetaine surfactants for use herein are the betaine/sulphobetaine and betaine-like detergents wherein the molecule contains both basic and acidic groups which form an inner salt giving the molecule both cationic and anionic hydrophilic groups over a broad range of pH values. Some common examples of these detergents are described in U.S. Pat. Nos. 2,082,275, 2,702,279 and 2,255,082, incorporated herein by reference. Preferred betaine and sulphobetaine surfactants herein are according to the formula



wherein R<sub>1</sub> is a hydrocarbon chain containing from 1 to 24 carbon atoms, preferably from 8 to 18, more preferably from 12 to 14, wherein R<sub>2</sub> and R<sub>3</sub> are hydrocarbon chains containing from 1 to 3 carbon atoms, preferably 1 carbon atom, wherein n is an integer from 1 to 10, preferably from 1 to 6, more preferably is 1, Y is selected from the group consisting of carboxyl and sulfonyl radicals and wherein the sum of R<sub>1</sub>, R<sub>2</sub> and R<sub>3</sub> hydrocarbon chains is from 14 to 24 carbon atoms, or mixtures thereof.

Examples of particularly suitable betaine surfactants include C<sub>12</sub>-C<sub>18</sub> alkyl dimethyl betaine such as coconut-betaine and C<sub>10</sub>-C<sub>16</sub> alkyl dimethyl betaine such as laurylbetaine. Coconutbetaine is commercially available from Seppic under the trade name of Amonyl 265®. Laurylbetaine is commercially available from Albright & Wilson under the trade name Empigen BB/L®.

Other specific zwitterionic surfactants have the generic formulas:



wherein each R<sub>1</sub> is a hydrocarbon, e.g. an alkyl group containing from 8 up to 20, preferably up to 18, more preferably up to 16 carbon atoms, each R<sub>2</sub> is either a hydrogen (when attached to the amido nitrogen), short chain alkyl or substituted alkyl containing from one to 4 carbon atoms, preferably groups selected from the group consisting of methyl, ethyl, propyl, hydroxy substituted ethyl or propyl and mixtures thereof, preferably methyl, each R<sub>3</sub> is selected from the group consisting of hydrogen and hydroxy groups and each n is a number from 1 to 4, preferably from 2 to 3, more preferably 3, with no more than one hydroxy group in any (C(R<sub>3</sub>)<sub>2</sub>) moiety. The R<sub>1</sub> groups can be branched and/or unsaturated. The R<sub>2</sub> groups can also be connected to form ring structures. A surfactant of this type is a C<sub>10</sub>-C<sub>14</sub> fatty acylamidopropylene(hydroxypropylene)sulfobetaine that is available from the Sherex Company under the trade name "Varion CAS sulfobetaine"®.

#### B. SOLVENT SYSTEM

The compositions herein can comprise a solvent system comprising a solvent or mixtures thereof. The solvent system herein can be used instead of, or in combination with, the surfactant system described *supra*. When used, solvents will, advantageously, give an enhanced cleaning to the compositions herein. Suitable solvents for incorporation in the compositions according to the present invention include propylene glycol derivatives such as n-butoxypropanol or n-butoxypropoxypropanol, water-soluble CARBITOL® solvents or water-soluble CELLOSOLVE® solvents. Water-soluble CARBITOL® solvents are compounds of the 2-(2-alkoxyethoxy)ethanol class wherein the alkoxy group is derived from ethyl, propyl or butyl. A preferred water-soluble carbitol is 2-(2-butoxyethoxy)ethanol also known as butyl carbitol. Water-soluble CELLOSOLVE® solvents are compounds of the 2-alkoxyethoxyethanol class, with 2-butoxyethoxyethanol being preferred. Other suitable solvents are benzyl alcohol, methanol, ethanol, isopropyl alcohol and diols such as 2-ethyl-1,3-hexanediol and 2,2,4-trimethyl-1,3-pentanediol and mixture thereof. Preferred solvents for use herein are n-

butoxypropoxypropanol, butyl carbitol®, benzyl alcohol, isopropanol, 1-propanol and mixtures thereof. Most preferred solvents for use herein are butyl carbitol®, benzyl alcohol, 1-propanol and/or isopropanol.

5 The solvent system, when present, is typically present in the compositions according to the invention at a level up to 100% by weight, preferably from 0.5% to 90%, more preferably from 1% to 10% by weight of the composition.

### C. OPTIONAL INGREDIENTS

10 The compositions herein may further comprise a variety of other optional ingredients such as peroxygen bleach, essential oils, organic acids, additional surfactants, chelants, solvents, builders, stabilisers, bleach activators, soil suspenders, dye transfer agents, brighteners, perfumes, anti dusting agents, enzymes, dispersant, dye transfer inhibitors, pigments, perfumes, radical scavengers, pH buffers, dyes or mixtures thereof.

#### i. PEROXYGEN BLEACH

15 The compositions according to the present invention may comprise a peroxygen bleach as an optional feature.

20 A preferred peroxygen bleach is hydrogen peroxide, or a water soluble source thereof, or mixtures thereof. As used herein a hydrogen peroxide source refers to any compound which produces hydrogen peroxide when said compound is in contact with water. Suitable water-soluble sources of hydrogen peroxide for use herein include percarbonates, persilicates, persulphates such as monopersulfate, perborates and peroxyacids such as diperoxydodecandioic acid (DPDA), magnesium perphthalic acid and mixtures thereof.

25 In addition, other classes of peroxides can be used as an alternative to hydrogen peroxide and sources thereof or in combination with hydrogen peroxide and sources thereof. Suitable classes include dialkylperoxides, diacylperoxides, preformed percarboxylic acids, organic and inorganic peroxides and/or hydroperoxides. The most preferred peroxygen bleach is hydrogen peroxide.

30 The presence of said peroxygen bleach especially hydrogen peroxide, persulfate and the like, in the compositions according to the present invention can contribute to disinfection properties of said compositions. Indeed, said peroxygen bleach may attack the vital function of the micro-organism cells, for example, it may inhibit the assembling of ribosomes units within the cytoplasm of the microorganisms cells. Also said peroxygen bleach like hydrogen peroxide, is an oxidiser that generates hydroxyl free radicals which attack proteins and nucleic acids. Furthermore, the presence of said peroxygen bleach, especially hydrogen peroxide, provides strong stain removal benefits which are particularly noticeable for example in laundry and hard  
35 surfaces applications.

Typically, peroxygen bleach or a mixture thereof is present in the compositions according to the present invention at a level of at least 0.01% by weight of the total composition, preferably from 0.1% to 15%, and more preferably from 1% to 10%.

## ii. ESSENTIAL OILS

5 Another preferred component of the compositions of the present invention is an antimicrobial essential oil or an active thereof, or a mixture thereof.

Suitable antimicrobial essential oils to be used herein are those essential oils which exhibit antimicrobial activity. By "actives of essential oils", it is meant herein any ingredient of essential oils or natural extracts that exhibit antimicrobial activity. It is speculated that said antimicrobial  
10 essential oils and actives thereof act as proteins denaturing agents. Also said antimicrobial oils and actives thereof are compounds which contribute to the safety profile of a composition comprising them when it is used to disinfect any surface. A further advantage of said antimicrobial oils and actives thereof is that they impart pleasant odor to a composition comprising them without the need of adding a perfume.

15 Such antimicrobial essential oils include, but are not limited to, those obtained from thyme, lemongrass, citrus, lemons, oranges, anise, clove, aniseed, pine, cinnamon, geranium, roses, mint, lavender, citronella, eucalyptus, peppermint, camphor, ajowan, sandalwood, rosmarin, vervain, fleagrass, lemongrass, ratanhia, cedar, organum, cypressus, propolis extracts and mixtures thereof. Preferred antimicrobial essential oils to be used herein are thyme oil, clove oil,  
20 cinnamon oil, geranium oil, eucalyptus oil, peppermint oil, citronella oil, ajowan oil, mint oil, organum oil, propolis, cypressus oil cedar, garlic extract or mixtures thereof.

Actives of essential oils to be used herein include, but are not limited to, thymol (present for example in thyme, ajowan), eugenol (present for example in cinnamon and clove), menthol (present for example in mint), geraniol (present for example in geranium and rose, citronella),  
25 verbenone (present for example in vervain), eucalyptol and pinocarvone (present in eucalyptus), cedrol (present for example in cedar), anethol (present for example in anise), carvacrol, hinokitiol, berberine, ferulic acid, cinnamic acid, methyl salicylic acid, methyl salicylate, terpineol, limonene and mixtures thereof. Preferred actives of essential oils to be used herein are thymol, eugenol, verbenone, eucalyptol, terpineol, cinnamic acid, methyl salicylic acid, limonene, geraniol, ajolene  
30 or mixtures thereof.

Thymol may be commercially available for example from Aldrich, eugenol may be commercially available for example from Sigma. Systems - Bioindustries (SBI) - Manheimer Inc.

Typically, the antimicrobial essential oil or active thereof or mixture thereof is present in the composition at a level of at least 0.001% by weight of the total composition, preferably from  
35 0.006% to 10%, more preferably from 0.01% to 8% and most preferably of from 0.03% to 3%.

It has now been found that combining said antimicrobial essential oil or an active thereof or a mixture thereof with a peroxygen bleach, in a composition, delivers not only excellent immediate disinfecting properties to the surfaces treated with said composition, but also long lasting disinfecting properties. Indeed, it is speculated that peroxygen bleach and said essential oils/actives adsorb on a surface having been treated with said composition and thus reduce or even prevent the contamination of microorganisms over time, typically up to 48 hours after the surface has been treated with said composition, thereby delivering long lasting disinfection. In other words, it is speculated that a microfilm of said active ingredients is deposited on the surface treated with said compositions allowing protection against microorganisms recontamination overtime. Advantageously, this long lasting disinfection benefits is obtained with the compositions of the present invention comprising peroxygen bleach and antimicrobial essential oils/actives even when used under highly diluted conditions, i.e., up to dilution levels of from 1:100 (composition:water).

Excellent long lasting disinfection is obtained by treating a surface with a composition comprising a peroxygen bleach and an antimicrobial essential oil or active thereof as described herein, on a variety of microorganisms, e.g., the growth of Gram positive bacteria like *Staphylococcus aureus*, and Gram negative bacteria like *Pseudomonas aeruginosa* as well as of fungi like *Candida albicans* is reduced or even prevented on a surface having been treated with said composition.

Long lasting disinfection properties of the compositions herein may be measured by the bactericidal activity of said compositions. A test method suitable to evaluate the long lasting bactericidal activity of a composition may be as follow: First, the surfaces (e.g. glass) to be tested are respectively treated with either a composition according to the present invention or a reference composition, e.g., a negative control composed of pure water (for example by spraying the composition directly on the surface or first spraying the composition on a sponge used to clean the surface or when the composition herein is executed in the form of wipe by wiping the surface therewith). After a variable time frame (e.g. 24 hours) each surface is respectively inoculated with bacteria ( $10^6$ - $10^7$  cfu/slide) cultured in for example TSB (Tryptone Soya Broth) and left typically from a few seconds to 2 hours before evaluating the remaining living bacteria. Then living bacteria (if any) are recovered from the surface (by touching TSA + neutraliser plates and by re-suspending the bacteria into the neutralisation broth and plating them on agar) and incubated at appropriate temperature, e.g. 37°C to let them grow typically over night. Finally, a visual grading of the living bacteria is made by comparing side by side the cultures and/or dilutions thereof (e.g.  $10^{-2}$  or  $10^{-1}$ ) resulting from the surfaces treated with the compositions according to the present invention and the reference composition.



In a particular embodiment of the present invention, depending on the end use desired with said compositions they may further comprise, as optional ingredients, other antimicrobial compounds that further contribute to the antimicrobial/antibacterial activity of the compositions according to the present invention. Such antimicrobial ingredients include parabens like ethyl paraben, propyl paraben, methyl paraben, glutaraldehyde or mixtures thereof.

### iii. ADDITIONAL SURFACTANTS

The compositions of the present invention may comprise an additional surfactant. The additional surfactant may be selected from other nonionic, amphoteric, zwitterionic or anionic surfactants including but not limited to those described above. Alternatively the additional surfactant may include for example a cationic surfactant or a C<sub>6</sub>-C<sub>20</sub> conventional soaps (alkali metal salt of a C<sub>6</sub>-C<sub>20</sub> fatty acid, preferably sodium salts).

### iv. CHELATING AGENT

The compositions herein may further comprise a chelating agent as a preferred optional ingredient. Suitable chelating agents may be any of those known to those skilled in the art such as the ones selected from the group comprising phosphonate chelating agents, aminophosphonate chelating agents, substituted heteroaromatic chelating agents, amino carboxylate chelating agents, other carboxylate chelating agents, polyfunctionally-substituted aromatic chelating agents, biodegradable chelating agents like ethylene diamine N,N'-disuccinic acid, or mixtures thereof.


Suitable phosphonate chelating agents to be used herein include etidronic acid (1-hydroxyethylene-diphosphonic acid (HEDP)), and/or alkali metal ethane 1-hydroxydiphosphonates.

Suitable amino phosphonate chelating agents to be used herein include amino alkylene poly (alkylene phosphonates), nitrilotris(methylene)triphosphonates, ethylene diamine tetra methylene phosphonates, and/or diethylene triamine penta methylene phosphonates. Preferred aminophosphonate chelating agents to be used herein are diethylene triamine penta methylene phosphonates.

These phosphonate/amino phosphonate chelating agents may be present either in their acid form or as salts of different cations on some or all of their acid functionalities. Such phosphonate/amino phosphonate chelating agents are commercially available from Monsanto under the trade name DEQUEST<sup>®</sup>.

Substituted heteroaromatic chelating agents to be used herein include hydroxypyridine-N-oxide or a derivative thereof.

Suitable hydroxy pyridine N-oxides and derivatives thereof to be used according to the present invention are according to the following formula:



wherein X is nitrogen, Y is one of the following groups oxygen, -CHO, -OH,  $-(CH_2)_n-COOH$ , wherein n is an integer of from 0 to 20, preferably of from 0 to 10 and more preferably is 0, and wherein Y is preferably oxygen. Accordingly particularly preferred hydroxy pyridine N-oxides and derivatives thereof to be used herein is 2-hydroxy pyridine N-oxide. Hydroxy pyridine N-oxides and derivatives thereof may be commercially available from Sigma.

Polyfunctionally-substituted aromatic chelating agents may also be useful in the compositions herein. See U.S. Patent No. 3,812,044, issued May 21, 1974, to Connor et al. Preferred compounds of this type in acid form are dihydroxydisulfobenzenes such as 1,2-dihydroxy-3,5-disulfobenzene.

A preferred biodegradable chelating agent for use herein is ethylene diamine N,N'-disuccinic acid, or alkali metal, or alkaline earth, ammonium or substituted ammonium salts thereof or mixtures thereof. Ethylenediamine N,N'-disuccinic acids, especially the (S,S) isomer have been extensively described in US Patent No. 4,704,233, November 3, 1987 to Hartman and Perkins. Ethylenediamine N,N'-disuccinic acid is, for instance, commercially available under the tradename ssEDDS<sup>®</sup> from Palmer Research Laboratories. Ethylene diamine N,N'-disuccinic acid is particularly suitable to be used in the compositions of the present invention.

Suitable amino carboxylate chelating agents useful herein include ethylene diamine tetraacetates, diethylene triamine pentaacetates, diethylene triamine pentaacetate (DTPA), N-hydroxyethylethylenediamine triacetates, nitrilotri-acetates, ethylenediamine tetrapropionates, triethylenetetraaminehexa-acetates, ethanoldiglycines, propylene diamine tetracetic acid (PDTA) and methyl glycine di-acetic acid (MGDA), both in their acid form, or in their alkali metal, ammonium, and substituted ammonium salt forms. Particularly suitable to be used herein are diethylene triamine penta acetic acid (DTPA), propylene diamine tetracetic acid (PDTA) which is, for instance, commercially available from BASF under the trade name Trilon FS<sup>®</sup> and methyl glycine di-acetic acid (MGDA).

Further carboxylate chelating agents to be used herein includes malonic acid, salicylic acid, glycine, aspartic acid, glutamic acid, or mixtures thereof.

Typically, the compositions according to the present invention comprise up to 5% by weight of the total composition of a chelating agent, or mixtures thereof, preferably from 0.01% to 3% by weight and more preferably from 0.01% to 1.5%.

#### iv. RADICAL SCAVENGER

The compositions herein may comprise a radical scavenger as another optional ingredient. Suitable radical scavengers for use herein include the well-known substituted mono and di hydroxy benzenes and derivatives thereof, alkyl- and aryl carboxylates and mixtures thereof. Preferred radical scavengers for use herein include di-tert-butyl hydroxy toluene (BHT), p-hydroxy-toluene, hydroquinone (HQ), di-tert-butyl hydroquinone (DTBHQ), mono-tert-butyl hydroquinone (MTBHQ), tert-butyl-hydroxy anisole (BHA), p-hydroxy-anisol, benzoic acid, 2,5-dihydroxy benzoic acid, 2,5-dihydroxyterephthalic acid, toluic acid, catechol, t-butyl catechol, 4-allyl-catechol, 4-acetyl catechol, 2-methoxy-phenol, 2-ethoxy-phenol, 2-methoxy-4-(2-propenyl)phenol, 3,4-dihydroxy benzaldehyde, 2,3-dihydroxy benzaldehyde, benzylamine, 1,1,3-tris(2-methyl-4-hydroxy-5-t-butylphenyl) butane, tert-butyl-hydroxy-aniline, p-hydroxy aniline as well as n-propyl-gallate. Highly preferred for use herein are di-tert-butyl hydroxy toluene, which is for example commercially available from SHELL under the trade name IONOL CP® and/or tert-butyl-hydroxy anisole. These radical scavengers further contribute to the stability of the peroxygen bleach-containing compositions herein.

Typically, the compositions according to the present invention comprise up to 5% by weight of the total composition of a radical scavenger, or mixtures thereof, preferably from 0.002% to 1.5% by weight and more preferably from 0.002% to 1%.

#### v. pH BUFFER

In the embodiment of the present invention wherein the compositions are formulated in the alkaline pH range, typically from 7.5 to 12, the compositions according to the present invention may further comprise a pH buffer or a mixture thereof, i.e. a system composed of a compound or a combination of compounds, whose pH changes only slightly when a strong acid or base is added.

Suitable pH buffers for use herein include borate pH buffer, phosphonate, silicate and mixtures thereof. Suitable borate pH buffers for use herein include alkali metal salts of borates and alkyl borates and mixtures thereof. Suitable borate pH buffers to be used herein are alkali metal salts of borate, metaborate, tetraborate, octoborate, pentaborate, dodecaboron, borontrifluoride and/or alkyl borate containing from 1 to 12 carbon atoms, and preferably from 1 to 4. Suitable alkyl borate includes methyl borate, ethyl borate and propyl borate. Particularly preferred herein are the alkali metal salts of metaborate (e.g. sodium metaborate), tetraborate (e.g., sodium tetraborate decahydrate) or mixtures thereof.

Boron salts like sodium metaborate and sodium tetraborate are commercially available from Borax and Societa Chimica Larderello under the trade name sodium metaborate® and Borax®.

Further suitable pH buffers for use herein include carbonates and bicarbonates including alkali metal salts of carbonates and bicarbonates.

The pH of the composition can also be adjusted to an acidic pH and/or buffered at that pH using any suitable acidifying agent, for example organic acids.

5 Typically, the compositions according to the present invention may comprise up to 15% by weight of the total composition of a pH buffer, or mixtures thereof, preferably from 0.01% to 10%, more preferably from 0.01% to 5% and most preferably from 0.1% to 3%.

### III. PACKAGING FOR THE PREMOISTENED WIPES

10 In a preferred embodiment according to the present invention, the premoistened wipes are packaged in the container in any convenient configuration which allows easy removal of a single or multiple wet wipe from the container. Preferably the wipes are packaged in rolls, stacks or piles. More preferably the wipes are provided in a stacked configuration which may comprise any number of wipes. Typically, the stack comprises from 2 to 150, more preferably from 5 to 100, most preferably from 10 to 60 wipes. Moreover the wipes may be provided folded or  
15 unfolded. Most preferably, the wipes are stacked in a folded configuration.

### IV. METHOD OF TREATING A SURFACE USING THE PREMOISTENED WIPES

20 In a preferred embodiment, the present invention encompasses a method of cleaning and/or disinfecting a surface, preferably a hard surface, comprising the step of contacting, preferably wiping, said surface with a premoistened wipe comprising a substrate which incorporates a composition as described herein.

In a preferred embodiment of the present invention, said method comprises the steps of contacting parts of said surface, more preferably soiled parts of said surface, with said premoistened wipe comprising a substrate which incorporates a composition as described herein.

25 In another preferred embodiment said method, after contacting said surface with said premoistened wipe comprising a substrate which incorporates a composition as described herein, further comprises the step of imparting mechanical action to said surface using said substrate which incorporates a composition as described herein. By "mechanical action" it is meant herein, agitation of the wet wipe on the surface, as for example rubbing the surface using the wet wipe.

30 By "surface", it is meant herein any surface including animate surface like human skin, mouth, teeth, and inanimate surfaces. Inanimate surfaces include, but are not limited to, hard-surfaces typically found in houses like kitchens, bathrooms, or in car interiors, e.g., tiles, walls, floors, chrome, glass, smooth vinyl, any plastic, plastified wood, table top, sinks, cooker tops,

dishes, sanitary fittings such as sinks, showers, shower curtains, wash basins, WCs and the like, as well as fabrics including clothes, curtains, drapes, bed linens, bath linens, table cloths, sleeping bags, tents, upholstered furniture and the like, and carpets. Inanimate surfaces also include household appliances including, but not limited to, refrigerators, freezers, washing machines, automatic dryers, ovens, microwave ovens, dishwashers and the like.

#### V. DESORPTION UNDER PRESSURE TEST METHOD

The amount of fluid released ("desorbed") by a premoistened wipe comprising a substrate and a cleaning composition when subjected to pressure (or a force) is measured according to the Desorption Under Pressure Test Method. The test method is carried out as follows.

The Desorption Under Pressure Test Method utilizes an apparatus as shown in the block diagram of **FIG. 2**. The apparatus **200** contains the following components: three Plexiglass sheets **205** (127 mm X 127 mm X 6.4 mm); metal disk weights **210** (76.2 mm diameter) weighing about 227 grams, about 455 grams, and about 906 grams; a standard reference absorbent core material **215** (the standard reference absorbent core material **215** is a single 102 mm X 102 mm piece of Ahlstrom No. 989 filter paper available from Ahlstrom Filtration, P.O. Box A, Mr. Holly Springs, Pa.), and a pre-moistened wipe test sample **220** (76.2 mm diameter). One of the Plexiglass sheets **207** is used as a weight (about 115 grams) for determining the amount of fluid desorbed from the test sample **220** of interest. A combination of metal disk weight(s) **210** and Plexiglass sheet(s) **207** is used to obtain the desired applied pressure load.

In the Desorption Under Pressure Test Method, the substrate of the test sample **220** is premoistened to a specific level (i.e., X-Load which is grams of fluid per gram of dry fiber in wipe) with a liquid composition according to Composition H, *infra*. The premoistened wipe test sample **220** is placed and centered on top of the standard reference absorbent core material **215**. A Plexiglass sheet **207** with the appropriate amount of metal disk weights **210** are placed (centered) on top of the premoistened wipe test sample **220**. After about 30 seconds, the top Plexiglass sheet **207** and the associated metal disk weights **210** are removed. The premoistened wipe test sample **220** is weighed to determine the amount of fluid released ("desorbed"). The amount of desorption (or lotion loss) is expressed in X-Load (i.e., grams of fluid loss per gram of dry fiber in wipe).

Test results are presented in a graph created by plotting lotion loss ("X-Load") vs. Pressure (psi). The graphs presented herein cover initial lotion X-Load factors of 2.2X and 3.2X

(i.e., the premoistened wipe test sample contains liquid composition at 2.2 and 3.2 times the dry fiber weight of the wipe). The applied pressure loads tested range from about 0.03 to about 0.46 psi.

5 All of the documents and references referred to herein are incorporated by reference, unless otherwise specified. All parts, ratios, and percentages herein, in the Specification, Examples, and Claims, are by weight and all numerical limits are used with the normal degree of accuracy afforded by the art, unless otherwise specified.

#### VI. EXAMPLES

10 The following are non-limiting examples of compositions that can be incorporated in the substrates of the present invention to form the premoistened wipes of the present invention. Such compositions are typically loaded onto a substrate of the present invention at a level of from about 50% to about 600%, preferably from about 100% to about 400%, by weight of the dry substrate.

<u>Ingredients</u>	<u>Composition</u>					
	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>	<u>E</u>	<u>F</u>
Thymol	0.025	---	---	---	---	---
Geraniol	0.0375	---	0.3	---	---	---
Perfume	0.0375	0.1	0.1	0.1	0.1	0.15
Ethanol	9.4	9.4	5	9.4	8	8
Propylene glycol butyl ether (nBP)	---	---	---	---	---	1.2
Silicone DowAF	---	0.003	---	0.003	0.003	0.003
C <sub>12-14</sub> amine oxide	---	0.2	0.2	---	0.1	---
C <sub>10</sub> amine oxide	---	---	---	0.2	---	0.02
C <sub>9-10</sub> EO10	1.0	0.2	-	0.8	0.1	---
C <sub>9-11</sub> EO5	---	---	---	---	---	0.1
C <sub>12-14</sub> Betaine sodium salt	0.25	---	---	---	---	---
2-Ethyl-Hexyl Sulphate	0.75	0.1	0.1	0.15	0.05	0.05
Citric acid	1.5	0.75	1.5	1.0	---	---
Lactic acid	---	---	---	---	0.44	---

Na <sub>2</sub> CO <sub>3</sub>	---	0.1	---	---	0.06	---
NaOH	---	0.45	---	---	0.2	---
Water	Bal.	Bal.	Bal.	Bal.	Bal.	Bal.
PH	2.4	9.5	2.8	2.8	9.5	7.1

Ingredient	Composition					
	G	H	I	J	K	L
Organic Acid #1 <sup>1</sup>	1.5	1.8	2.75	1.25	1.5	0.75
Surfactant #1 <sup>2</sup>	1.75	1.75	1.0	1.0	1.0	2.0
Solvent #1 <sup>3</sup>	0.5	0.5	---	---	0.5	0.5
Hydrotrope <sup>4</sup>	1.2	1.2	---	0.45	1.20	1.2
Suds Suppressor <sup>5</sup>	---	0.0037	---	0.0030	---	---
Perfume	0.2	0.2	---	0.20	0.20	0.2
Water	Balance	Balance	Balance	Balance	Balance	Balance

5 <sup>1</sup> Citric acid commercially available from Cargill.

<sup>2</sup> Nonionic alcohol ethoxylate surfactant commercially available from Vista Chemical Company under the tradename ALFONIC® 810-6 Ethoxylated.

<sup>3</sup> Butoxy propoxy propanol commercially available from Dow Chemical.

10 <sup>4</sup> Sodium cumene sulfonate commercially available from Reutgers-Nease Chemical Company under the tradename NAXONATE® 45SC.

<sup>5</sup> Silicone suds suppressor commercially available from Dow Corning under the tradename DOW AF.

Ingredient	Composition			
	M	N	O	P
Organic Acid #1 <sup>6</sup>	1.5	1.5	---	---
Organic Acid #2 <sup>7</sup>	---	---	4.0	---
Organic Acid #3 <sup>8</sup>	---	---	---	3.0
Surfactant #1 <sup>9</sup>	---	---	1.0	1.5
Surfactant #2 <sup>10</sup>	0.4	1.0	---	---
Solvent #2 <sup>11</sup>	9.4	9.4	---	---
Solvent #3 <sup>12</sup>	0.55	0.55	---	---
Solvent #4 <sup>13</sup>	0.55	0.55	---	---
Perfume	0.075	0.75	---	---
Water	Balance	Balance	Balance	Balance

<sup>6</sup> Citric acid commercially available from Cargill.

7 Acetic acid commercially available from Aldrich.

8 Lactic acid commercially available from Aldrich.

9 Nonionic alcohol ethoxylate surfactant commercially available from Vista Chemical Company under the tradename ALFONIC® 810-6 Ethoxylated.

5 10 Amine oxide (C<sub>12</sub>) surfactant commercially available from the Stepan Company under the trade name NINOX® X9336.

11 Ethanol commercially available from Aldrich.

12 Propylene glycol t-butyl ether commercially available from Aldrich.

13 Di(ethylene glycol) butyl ether commercially available from Aldrich.

10

The following examples, Substrate A and Substrate B, are non-limiting examples of substrates according to the present invention. The controlled fluid release performance of Substrate A and Substrate B are tested against Comparative Substrate C and Comparative Substrate D according to the Desorption Under Pressure Test Method described in Section V, *supra*. The results show that Substrate A and Substrate B have much better controlled fluid release performance than Comparative Substrate C. The results further show that Substrate A and Substrate B have controlled fluid release performance similar to that of Comparative Substrate D, which is an airlaid substrate containing a binder material.

20

#### Substrate A

Substrate A is a multi-layer substrate as shown in **FIGS. 1a** and **1b** and described in Section I, *supra*.

#### Substrate B

25 Substrate B is a 70 gsm carded thermal bonded nonwoven substrate consisting of three carded fiber layers (two surface contact layers and one reservoir layer) thermal bonded together with a 7-point pattern. The overall fiber composition is about 58% hydrophilic polypropylene (2.2 dpf, 38 mm length, FiberVisions Americas Type 193), about 25% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099), and about 18% PET (6.0 dpf, 50mm, Wellman, Inc. Type 204). The two surface contact layers are made of a homogenous blend of  
30 about 60% hydrophilic polypropylene (2.2 dpf, 38 mm length, FiberVisions Americas Type 193), about 10% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099), and about 30% PET (6.0 dpf, 50mm, Wellman, Inc. Type 204) with a basis weight of about 20.5 gsm



per layer. The reservoir layer is made of a homogenous blend of about 55% hydrophilic polypropylene (2.2 dpf, 38 mm length, FiberVisions Americas Type 193) and about 45% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099 with a basis weight of about 29.0 gsm.

5 Substrate B is made according to the following process. The reservoir layer is made by blending (by weight) about 55% hydrophilic polypropylene (2.2 dpf, 38 mm length, FiberVisions Americas Type 193) and about 45% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099). These blends are fed into two cards (about 14.5 gsm per card) to form a reservoir layer with an overall basis weight of about 29.0 gsm. After carding, the reservoir layer  
10 was embossed with a continuous 7-point pattern at about 300°F and about 540 psi and wound for later use in forming the multi-layer substrate.

The two surface contact layers of Substrate B are made by blending (by weight) of about 60% hydrophilic polypropylene (2.2 dpf, 38 mm length, FiberVisions Americas Type 193), about 10% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099), and about  
15 30% PET (6.0 dpf, 50mm, Wellman, Inc. Type 204). These blends are fed into two cards (top and bottom, about 20.5 gsm per card). In forming the multi-layer substrate (Substrate B): (1) the bottom carded fiber surface contact layer is placed on a moving conveyor, (2) the pre-made center reservoir layer is unwound on top of the bottom carded fiber surface contact layer, and (3)  
20 the top carded fiber surface contact layer is placed on top of the pre-formed center reservoir layer and the bottom carded fiber layer. These three fibrous web layers are thermally embossed together with a continuous 7-point pattern at about 300°F and about 540 psi. The resultant Substrate B has an average basis weight of about 70 gsm.

#### Comparative Substrate C

Comparative Substrate C is a 70 gsm carded thermal bonded nonwoven substrate made  
25 of a homogenous blend of about 50% hydrophilic polypropylene (2.2 dpf, 38 mm length, FiberVisions Americas Type 193), about 20% viscose rayon (1.5 dpf, 40mm length, Acordis Cellulosic Fibers, Inc. T-1099), and about 30% PET (6.0 dpf, 50mm, Wellman, Inc. Type 204) with a continuous 7-point pattern embossed pattern.

Comparative Substrate C is made according to the following process. Hydrophilic  
30 polypropylene, viscose rayon, and polyester fibers are blended together at about 50%, about 20%, and about 30% by weight and then carded. Three cards (individual card basis weight of about 23.3 gsm) are used to form a homogenous composite web (at 25 meters/min) with a total basis

weight of about 70 gsm. After carding, the homogenous composite web is thermally embossed (about 300 °F and about 540 psi) with a continuous 7-point pattern embossed pattern. The resultant web has a basis weight of about 70 gsm.

#### Comparative Substrate D

- 5 Comparative Substrate D is a 73 gsm air laid substrate made of a homogenous blend of about 73% wood pulp (Weyherhaeuser NF405), about 15% polyester (DuPont 612W), and about 12% Cymel Binder. The web has an average caliper of 1.12 mm and average density of about 0.065g/cm<sup>3</sup>.

#### DESORPTION UNDER PRESSURE TEST #1

- 10 Substrate B and Comparative Substrates C and D are tested according to the Desorption Under Pressure Test Method. The substrates are prepared by loading Composition H (see *supra*) onto each substrate at a loading factor of 2.2X. **FIG. 3** is a graph of the results of the Desorption Under Pressure test for Substrate B (denoted "FFC-C"), Comparative Substrate C (denoted "15266-01"), and Comparative Substrate D (denoted "Air Laid"). As can be seen in the graph of
- 15 **FIG. 3**, Substrate B (which is a multi-layer substrate of the present invention) exhibited much more controlled release of the liquid composition than Comparative Substrate C (which is a homogeneous web, instead of a multi-layer web). Also, as can be seen in the graph of **FIG. 3**, Comparative Substrate D, which is a homogeneous fiber blend airlaid material, also exhibited excellent controlled fluid release properties, however, such substrate contains a binder material
- 20 that can negatively impact filming and streaking, especially of hard surfaces.

#### DESORPTION UNDER PRESSURE TEST #2

- 25 Substrates A and B, and Comparative Substrates C and D, are tested according to the Desorption Under Pressure Test Method. The substrates are prepared by loading Composition H (see *supra*) onto each substrate at a loading factor of 3.2X. **FIG. 4** is a graph of the results of the Desorption Under Pressure test for Substrate A (denoted "FFC-D1"), Substrate B (denoted "FFC-C"), Comparative Substrate C (denoted "15266-01"), and Comparative Substrate D (denoted "Air Laid"). As can be seen in the graph of **FIG. 4**, Substrates A and B (which are multi-layer
- 30 substrates of the present invention) exhibited much more controlled release of the liquid composition than Comparative Substrate C (which is a homogeneous web, instead of a multi-layer web). Also, as can be seen in the graph of **FIG. 4**, Comparative Substrate D, which is a

homogeneous fiber blend airlaid material, also exhibited excellent controlled fluid release properties, however, such substrate contains a binder material that can negatively impact filming and streaking, especially of hard surfaces.

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
2217  
2218  
2219  
2220  
2221  
2222